



# DURATANK

PORTABLE

- Maximize patching efficiency
- 1000 Gallon Portable Storage
- Electric heat Blankets
- Optional Skid Mount




Save fuel and transport costs with less trips to the emulsion plant with the CPMG 1000TT emulsion transport trailer. When the 1000TT is paired with a spray injection patcher, your crew stays out patching longer.

**1,000-gallon capacity tank:** Allows crews to fill patching or other equipment quickly using the 5-hp Honda engine driving a 15 gpm Viking pump. A recirculation circuit in the plumbing provides agitation for the emulsion and a five-gallon tank provides solvent for flushing the pump.

**Electric heated thermostatic controlled:** Two 1500-watt, 110-volt heating blankets (220V available) with a thermostat help maintain the optimum emulsion application or storage temperature. Blanket heating also allows the tank to be pre-heated. A temperature gauge allows easy monitoring.


**Heavy gauge insulated tank:** Filling the tank is simple with the large 14" vented, locking loading port. The tank features two-inches of insulation and it is protected from the elements with a fire retardant cover.

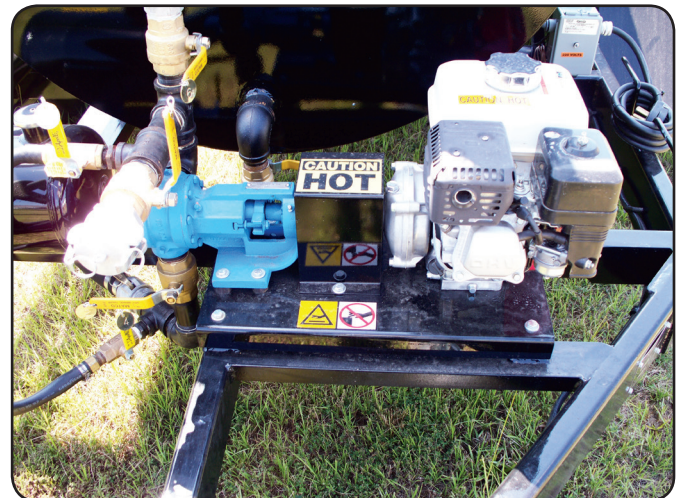

On-board pumping system



Overnight electric heat system.

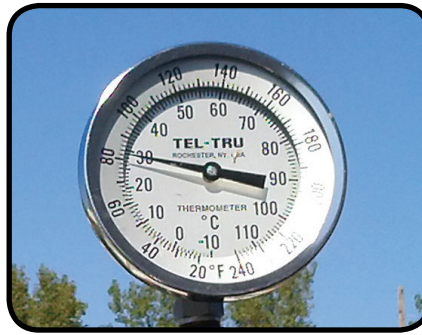

Large temperature gauge.



Easy - fill vented loading hatches.



Skid mount available.

## Other Patching Products from CPMG



DuraTruck



DuraMaxx



DuraPatcher

# SPECIFICATIONS

### 1000TT DuraTank portable storage unit

Emulsion Capacity (US gallons):	1000
Engine:	5HP Gas Honda
Heating Method (overnight):	Electric Blanket
Heat Rating (watts):	1500 x 2, 110VAC (220VAC optional)
Material Pump (GPMS):	15
GVWR (lbs):	12,500
GAWR (lbs):	7000x2
Axle/Suspension:	2 (slipper spring)
Brake Type:	Electric
Loading Hose:	2" ID x 96"
Loading Ports:	14" x2 (one vented and lockable)
Fuel Capacity:	2 Gallons
Insulation:	2" with fiber reinforced cover
Trailer Construction:	2" x 6" x 1/4" Tube Steel
Drain Valve:	3"
Temperature Gauge:	5" Dial type
Dimensions (l x w x h):	190" x 90" x 90"
Shipping Weight (lbs):	3,760
Warranty:	One Year

Due to continuous improvement, specifications are subject to change without notice.

Distributed By:



FULL PRODUCT LINE

