



# DURATANK

STATIONARY

- Efficient Blanket Heating
- Robust Design
- Timed Paddle Agitator
- Simple & Safe Operation



Become self-sufficient in your patching and chip seal programs by installing a stationary emulsion storage tank. Convenient access to properly heated emulsion is critical to streamline the short patching and chip seal season. On-demand supply of emulsion keeps crews out working and not driving to the emulsion plant. DuraTanks are available in capacities from 3,000 to 10,000 gallons.

**Efficient blanket heating-** The DuraTank from DuraPatcher utilizes 1,000 watt electric blankets for even trouble free heating. Blanket heating is superior to probe heating because it eliminates material build up issues and allows the tank to be preheated prior to filling. 240VAC single phase power minimizes power consumption and makes for an easy hook up.

**Robust design-** All DuraTanks are constructed using 1/4 inch carbon steel for long life and durability. 3 inches of foil backed insulation keeps the heat inside and minimizes operating costs. The aluminum outer skin provides resistance to the elements and protects your investment for years to come.

**Agitator and Control System-** The DuraTank digital control system makes programming and operation quick and easy. The specially designed agitator provides just the right amount of agitation and minimizes over mixing. The Timer allows the operator the flexibility to choose the time and days for agitation. The standard Material Tank gauge is easy to read from ground level and is calibrated in 100 gallon increments.

**Safety and Accessibility-** All DuraTanks include a ladder and heavy duty manway and rail system. Maintenance greasing, loading and unloading processes are all performed from ground level. DuraTanks also include a 24" inspection door at the top for access to tank. The standard 5ft 5 inch height stand allows for day





Special designed paddle agitation.



Optional 8 ft Leg System.



Standard Manway and ladder guard.



Convenient access panel.

## Other Patching Products from CPMG



DuraTruck



DuraMaxx



DuraPatcher

# SPECIFICATIONS


Emulsion Capacity (US gallons):	3,000 to 10,000
Heating Method: (240VAC Single Phase)	1,000 watt electric blankets (number varies based on size) (4 blankets)- 3,000 to 5,000 gallon models (6 blankets)- 6,000 to 8,000 gallon models (8 blankets)- 10,000 gallon model
Delivery System:	Gravity no pump standard, Pump system optional
Loading Hose:	3 in. x 8 ft. (quick couplers)
Tank Construction:	¼ in. carbon steel
Insulation:	3 in. foil backed
Valves:	(2) 3 in. heated and insulated
Tank Cleanout Valve:	3 in. insulated in bottom of tank
Agitator:	Paddle type, 6 rpm or less, Timed
Inspection Hatch:	24 in. insulated. Ladder rail system & manway included
Support Stand Height:	5 ft. 5 in. (8 ft. option available)
Material Gauge:	Mechanical float type 100 gallon increments
Warranty:	One Year Limited

Due to continuous improvement, specifications are subject to change without notice.

Distributed By:



**CPMG** **CIMLINE PAVEMENT MAINTENANCE GROUP**  
 cimlinepmg.com 800-328-3874

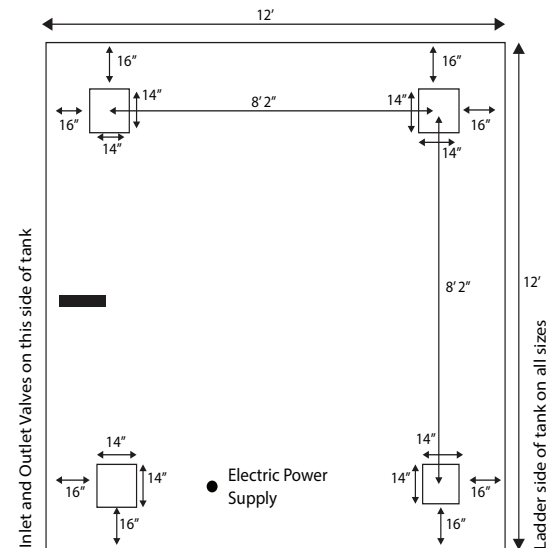

End user responsible for pad construction, tank unloading, and jobsite electrical.

FULL PRODUCT LINE

