BROOE BROOM HYDROSTATIC DRIVE **SPECIFICATIONS**

Standard Equipment Specs

- Certified Roll Over Structure and Canopy complies with ISO3471
- Main Frame All Welded 6" Channel
- . Heavy Structural Steel with Gussets at Stress Points
- 6" Rectangular Tubing Front and Rear Bumpers
- · Front Fenders are Standard Equipment on Some Configurations
- . Weight (standard unit) 5,000 lbs.
- · Overall Length 172 inches
- · Overall Width for Transport 96 inches
- · Overall Height 102 inches
- . Inside Turning Radius 13 feet
- · Brakes Equipped with Dual Master Cylinder, Four Wheel Hydraulic Self Adjusting on Rear and Disc on Front, and Mechanical Parking Brake
- Brush Core 8' all Steel Welded Construction
- · Brush Filler 10" x 32" Wafers Prostran
- Sweeping Width 96"
- · Brush Drive Direct Drive Motor enclosed in Core, 192 RPM under load
- Core Cover 140 degrees 14 Gauge Steel with Rock Deflector
- Swing Frame Mounted on 9 Heavy Duty Sealed Ball Bearings
- · Sweeping Angle 45 degrees Left or Right
- · Broom Controls Single Lever Joystick Control Valve w/Adjustable Down Pressure and Roat Position
- Hydraulic Tank Capacity 27 US Gallons w/100 Mesh Suction Strainer
- Operating Pressure 3,000 PSI
- Pump Capacity 26 GPM at 2600 RPM
- Filter Two 10 Micron Replaceable Element (suction and return)
- Fuel Capacity 27 US Gallons
- Front Axle Heavy Duty Oscillating w/Disc Brakes
- Rear Axle Dana Heavy Duty Truck Type w/Drum Brakes
- Wheels 6 x 16 6 Bolt on 5 1/2 Centers
- Tires LT225X75X 16 Load Range E
- · Steering Orbital Type Power Steering
- Padded Seat with Arm Rest and Seat Belts Complies with ISO 6683
- Cross-Link Electricial Wiring Complies with SAE J-1128
- · Instruments and Controls Water Temperature, Oil Pressure, Volt Meter, Tachometer, Hour Meter, Fuel Gauge, Reverse Alarm, Rear View Mirror, Controls for Broom Drive, Core Angling, Core Height, Bectric Core Lock, Engine Throttle, Brakes, Directional Control, Parking Brake with Engaging Light, Traffic Horn
- Transmission Sauer-Danfoss Hydrostatic Pump and Motor coupled to a 2-Speed Gearbox with Neutral Shift for Towing. Low Gear 13 MPH, High Gear 34 MPH
- Air Cleaner Donaldson Dual Element Type with Precleaner
- Engine Options: Model RCT-350 B3.3TAA Turbo Charged Cummins Diesel, 4 Cylinder, 85 HP @2600 RJ-350 4.5 Turbocharged John Deere Diesel, 4 Cylinder, 80 HP @2400 OR-350 4.4 Turbocharged Caterpillar Diesel, 4 Oylinder, 82 HP @2200

In an effort to improve the product, Broce Mfg, reserves the right to change without prior notice or obligation any specifications and/or features.


Optional Equipment

- · 150 Gallon Water Sprinkling System w/Poly Tank
- · Tilt & Telescoping Steering
- 7 1/2 R. Scraper Blade
- · Canopy Windshield
- · Light Group Turn Signals, Warning Lights, Halogen Headlights and Taillights
- · Work Lights Side or Rear
- · Amber Beacon or Strobe Light
- · Turbo II Precleaner or Sy-Klone
- · Extension Air Cleaner Stack
- · Spare Tire with Mount
- · Enclosed Cab with Safety Glass and Wiper
- · Cab Heater and Defroster Plenum
- Pressurized Air Conditioning
- · Rear Windshield Wiper
- · Windshield Washer Front or Rear
- Hydraulic Temperature Gauge
- · Tow Hitch with Safety Chains Surge Brake Available
- Suspension Seat
- Audible Engine Alarm System
- 96" Poly Tube Broom
- Hydrostatic Hand Control
- · Heavy Duty Rear Axle
- · Curb and Cutter Brush
- Safety Engine Shut Down System
- Block Heater
- AM/FM Stereo Package
- Vari-Speed Brush

Servicing Dealer

Visit our web site at www.brocebroom.com

TOLL FREE: 1-877-857-1750 LOCAL: 604-857-1750

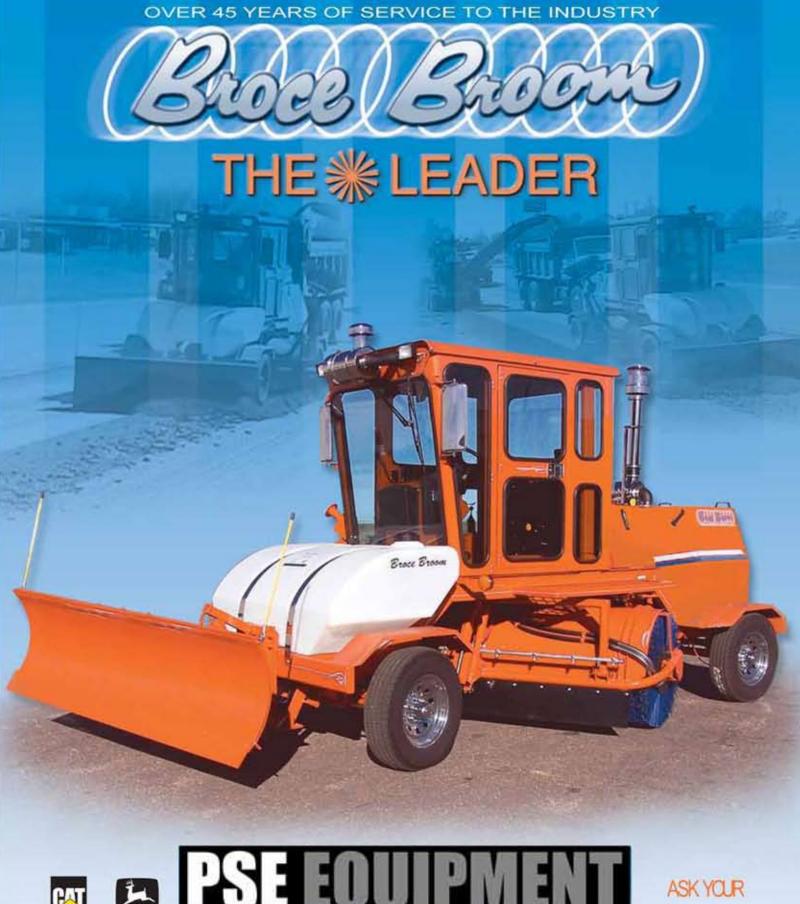











TOLL FREE: 1-877-857-1750 LOCAL: 604-857-1750

NEAREST BROCE **DEALER FOR A** DEMONSTRATION TODAY!

CPTIONAL CURB SWEEPER



EASY TO OPERATE WITH CONTROLS AT OPERATOR'S STATION

The Broce Curb Sweeper is a special option available on all 4-wheel model Broce Brooms: This attachment has been designed to help clean in places that are tough to reach and are outside the sweeping radius of the main broom

The Broce Curb Sweeper features a 27" diameter brush, heavy-duty construction, a reversible hydraulic motor and hydraulically operated float and down pressure for heavy sweeping.



ENGINE OPTIONS & EASE OF MAINTENANCE

The enclosed engine cover is standard equipment on all Broce Brooms. With John Deere, Ournmins and Caterpillar diesel engines to choose from, we can meet your power unit requirements.



STANDARD Front Disc Brakes

DIRECTORIVE CORE

Broce uses a Danfoss HD High

bearings designed for high side


Torque Motor with two roller

MOTOR



KEEP THE DUST TO A MINIMUM FOR COMENIENCE **AND SAFETY**

Our 150 gallon rust proof water spray system consists of a low profile polyethylene tank, 2.1 gpm electric pump, strainer filter and 8 spray nozzles to control excessive dust with the push of a button. This system also includes a back flow valve to prevent tank drainage when not in use.

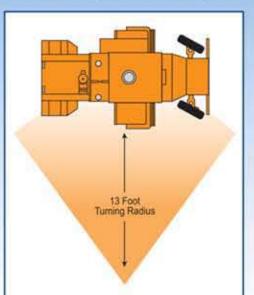

With our compact wheel base, the Broce Broom offers better maneuverability for working in tight places.

EXCLUSIVE

Joystick broom control with easy access from operator's station.



WATER SPRAY SYSTEMS

DUST CONTROL WHEN YOU NEED IT



OPTIONAL Suspension seat.





HMDROSTATIC DRIVEWITH 2 SPEED GEAR BOX

All Broce Brooms are supplied with our unique hydrostatic drive train with a hot oil shuttle built into the drive motor for continuous oil flow back to the cooler.




USE THE BLADE FOR CLEANING BEHIND YOUR MILLING MACHINE OR CHIP AND SEAL JOBS

The blade will hydraulically lift vertically for clearance and angle right to left with a control located at operator's station. A quick coupling allows the blade to be removed when not in use. The replaceable cutting edge will give hours of continued use.



DEFROSTER PLENUM

Plenum utilizes the fan and the warm air from the heater and has three vents to direct the warm air onto the windshield

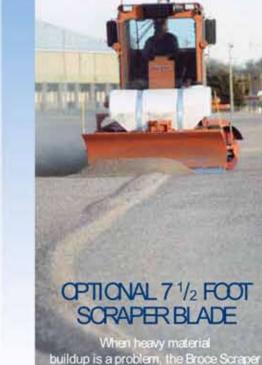

Blade is a must